


Dashboard

Replacement

1. To remove the dashboard, first slide the seats back fully and remove the:


- Front console. (page 14-53).

2. Remove the fuse lid and disconnect the wire harnesses from the connector holder, and fuse box. Disconnect the sunroof switch connector.

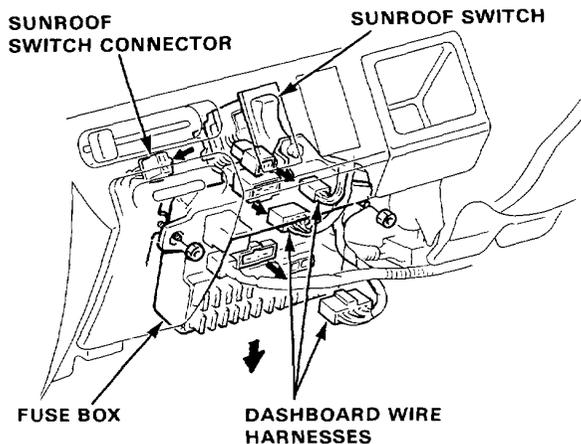


NOTE: Remove the fuse box mounting nuts, then lower the fuse box, if necessary.


3. Disconnect the ground cable at right of steering column and power door mirror switch connector.

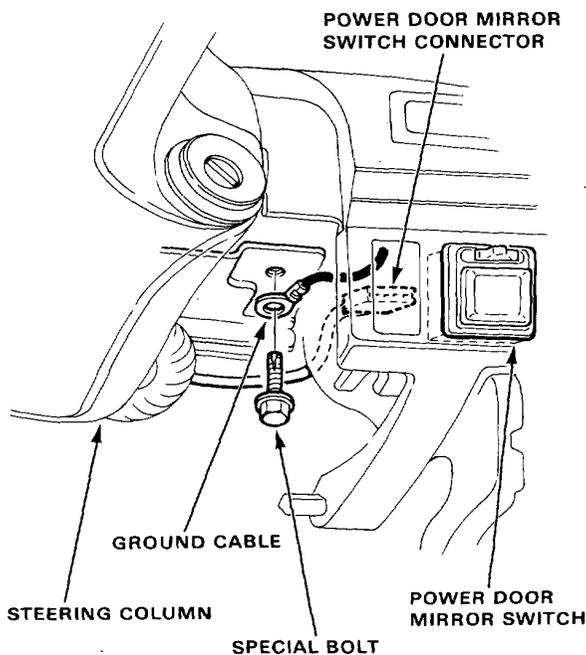

4. Remove the coin box.
5. Remove the knob, then remove the side air vent face plate.
6. Remove the 2 screws attaching the side air vent control lever.

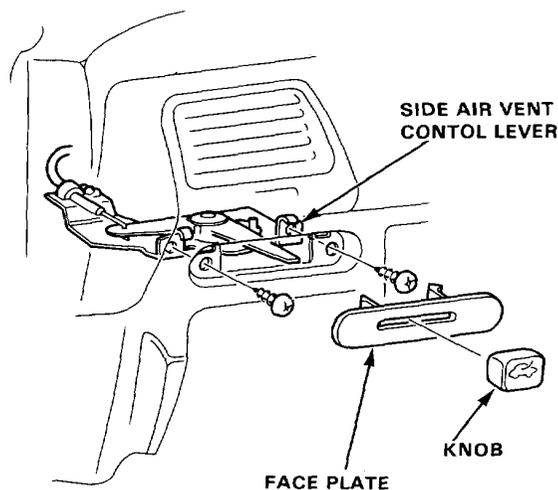

7. Remove the 3 screws attaching the function panel to the dashboard.

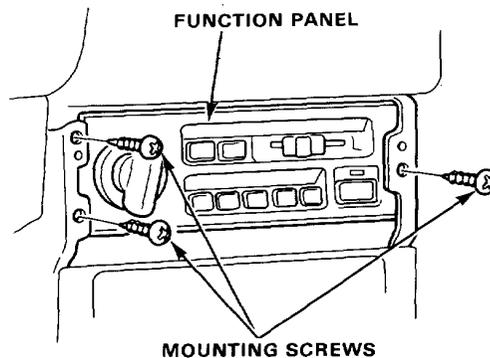



8. Remove the instrument panel (Page 14-55).
9. Disconnect the speedometer cable.
10. Remove the center upper lid from the top of the dashboard.
11. Remove the side defroster garnishes from both ends of the dashboard.
12. Lower the steering column (See section 11).
13. Remove the dashboard mounting bolts.
14. Lift and remove the dashboard.

Reassembly NOTE:

- Make sure the dashboard fits onto the body correctly.
- Before tightening the dashboard bolts, make sure the dashboard wires are not pinched, and that the dashboard is not interfering with the heater control cable.

