




Wind Deflector Replacement

1. Remove the deflector mount screws, then remove the deflector.

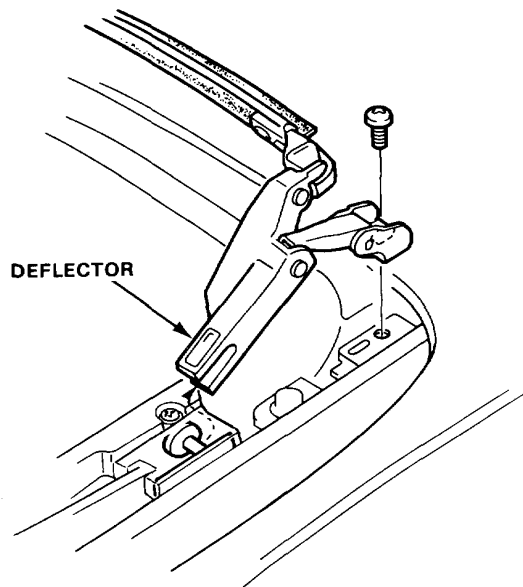


2. Install the deflector in the reverse order of removal. Adjust the deflector.


Wind Deflector Adjustment

NOTE: A gap between deflector blade and roof opening edge will cause excessive wind noise when driving at high speed with the roof open.

1. Open the sunroof fully.
2. Loosen the deflector mount screws.

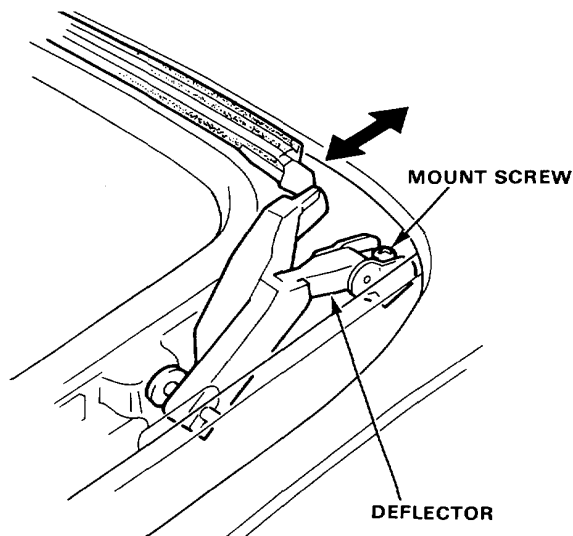

3. Adjust the deflector forward or backward so the edge of its blade touches the front edge of the roof opening evenly.

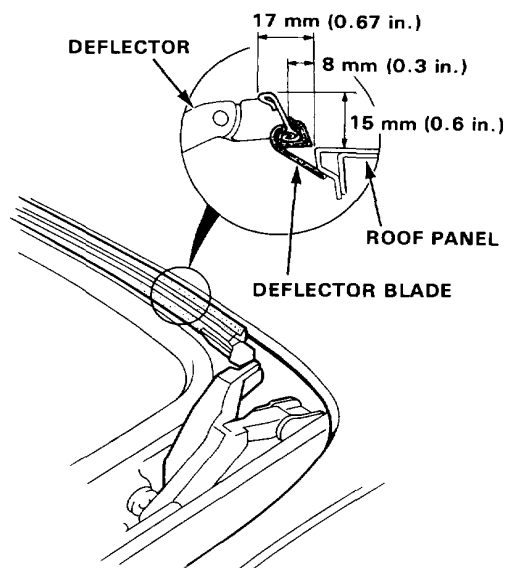

4. Check the height of the deflector.

NOTE: The height of the deflector cannot be adjusted. If damaged or deformed, replace or repair it.